


# PLEATED PANEL FILTER - 20mm - COARSE 80%

## PANEL FILTER

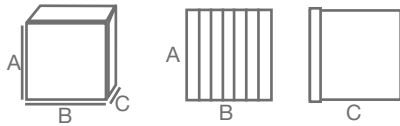

### FEATURES

**Applications:** Prefiltration for a wide range of air applications including conventional ventilation and air conditioning systems, in offices, schools and laboratories, air blowers, paint booths. Single-stage filter for low-grade applications

**Specifications:** Tested to EN779, grade G4. Pleated synthetic filter material with expanded metal backing. max operating temperature 80°C

**Options:** Metal casing/ Non-standard sizes available to order

**Classification:** ISO Course 80%

Product Code	Height A		Width B		Depth C		Grade	Flow Rate (m³/h)
	mm	inch	mm	inch	mm	inch		
B201/1120	241	10	241	10	20	1	G4	315
B201/1001	292	12	292	12	20	1	G4	465
B201/1121	368	15	368	15	20	1	G4	735
B201/1016	394	16	394	16	20	1	G4	840
B201/1048	445	18	445	18	20	1	G4	1070
B201/1218	495	20	241	10	20	1	G4	645
B201/1219	495	20	368	15	20	1	G4	985
B201/1014	495	20	394	16	20	1	G4	1055
B201/1048	495	20	495	20	20	1	G4	1325
B201/1002	594	24	292	12	20	1	G4	940
B201/1005	594	24	495	20	20	1	G4	1590
B201/1007	594	24	594	24	20	1	G4	1910
B201/1003	622	25	394	16	20	1	G4	1325
B201/1220	622	25	495	20	20	1	G4	1665



# FILTREX

SMART FILTRATION