


PLEATED PANEL FILTER - 45MM - COARSE 80%

PANEL FILTER

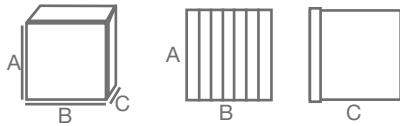

FEATURES

Applications: Prefiltration for a wide range of air applications including conventional ventilation and air conditioning systems, in offices, schools and laboratories, air blowers, paint booths. Single-stage filter for low-grade applications

Specifications: Tested to EN779, grade G4. Pleated synthetic filter material with expanded metal backing. max operating temperature 80°C

Options: Metal casing/ Non-standard sizes available to order

Classification: ISO Course 80%

Product Code	Height A		Width B		Depth C		Grade	Flow Rate
	mm	inch	mm	inch	mm	inch		
B202/1215	241	10	241	10	45	2	G4	525
B202/1001	292	12	292	12	45	2	G4	770
B202/1003	368	15	368	15	45	2	G4	1220
B202/1006	394	16	394	16	45	2	G4	1400
B202/1009	445	18	445	18	45	2	G4	1785
B202/2403	495	20	241	10	45	2	G4	1075
B202/1004	495	20	368	15	45	2	G4	1640
B202/1005	495	20	394	16	45	2	G4	1760
B202/1011	495	20	495	20	45	2	G4	2210
B202/1002	594	24	292	12	45	2	G4	1565
B202/1012	594	24	495	20	45	2	G4	2650
B202/1014	594	24	594	24	45	2	G4	3180
B202/1008	622	25	394	16	45	2	G4	2210
B202/1013	622	25	495	20	45	2	G4	2775



FILTREX

SMART FILTRATION