


K-SERIES BAG FILTER - EPM10 55% (M5)

BAG FILTER



FEATURES

- Very strong double rolled corrosion resistant header frame
- Plastic header frame available upon request
- Tested for food contact according to CE 1935/2004
- Certified for microbial development (ISO 846-VD 6022)
- Welded synthetic media pocket construction
- Final pressure drop: 300 Pa, recommended final pressure drop: 250Pa
- Max Temperature: 70°C
- Humidity: 100% RH

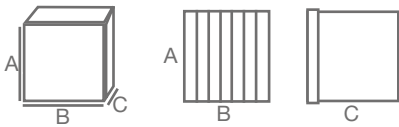

Product Code	Height A (mm)	Width B (mm)	Depth C (mm)	Pocket	Header (mm)	Media Area (m ²)	Flow Rate (m ³ /h)	Initial Pressure Drop (pa)
D300/1841	592	592	600	8	20	5.7	3400	40
D300/3641	592	490	600	6	20	4.3	2900	40
D300/2441	592	287	600	4	20	2.9	1700	40
D300/1632	592	592	500	6	25	4.3	3400	45
D300/3532	592	490	500	5	25	2.9	2900	45
D300/2432	592	287	500	3	25	1.8	1700	45
D300/1621	592	592	380	6	20	2.9	3400	67
D300/3521	592	490	380	5	20	2.3	2900	67
D300/2321	592	287	380	3	20	1.4	1700	67



FILTREX

SMART FILTRATION