


# K-SERIES BAG FILTER - EPM10 70% (M6)

## BAG FILTER

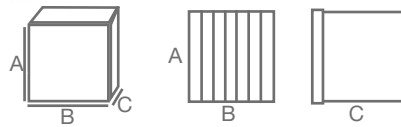

### FEATURES

- Very strong double rolled corrosion resistant header frame
- Plastic header frame available upon request
- Tested for food contact according to CE 1935/2004
- Certified for microbial development (ISO 846-VD 6022)
- Welded synthetic media pocket construction
- Final pressure drop: 300 Pa, recommended final pressure drop: 250Pa
- Max Temperature: 70°C
- Humidity: 100% RH

| Product Code | Height A (mm) | Width B (mm) | Depth C (mm) | Pockets | Header (mm) | Media Area (m <sup>2</sup> ) | Flow Rate (m <sup>3</sup> /h) | Initial Pressure Drop (pa) |
|--------------|---------------|--------------|--------------|---------|-------------|------------------------------|-------------------------------|----------------------------|
| D400/1841    | 592           | 592          | 600          | 8       | 20          | 5.7                          | 3400                          | 50                         |
| D400/3641    | 592           | 490          | 600          | 6       | 20          | 4.3                          | 2800                          | 50                         |
| D400/2441    | 592           | 287          | 600          | 4       | 20          | 2.8                          | 1700                          | 50                         |
| D400/1832    | 592           | 592          | 500          | 8       | 25          | 4.7                          | 3400                          | 63                         |
| D400/3632    | 592           | 490          | 500          | 6       | 25          | 3.6                          | 2800                          | 63                         |
| D400/2432    | 592           | 287          | 500          | 4       | 25          | 2.4                          | 1700                          | 63                         |
| D400/1821    | 592           | 592          | 380          | 8       | 20          | 3.6                          | 3400                          | 58                         |
| D400/3621    | 592           | 490          | 380          | 6       | 20          | 2.6                          | 2800                          | 58                         |
| D400/2421    | 592           | 287          | 380          | 4       | 20          | 1.7                          | 1700                          | 58                         |



# FILTREX

SMART FILTRATION