


K-SERIES BAG FILTER - EPM1 70% (F8)

BAG FILTER

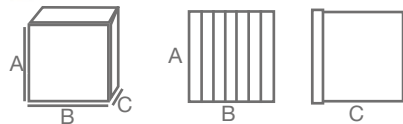

FEATURES

- Very strong double rolled corrosion resistant header frame
- Plastic header frame available upon request
- Tested for food contact according to CE 1935/2004
- Certified for microbial development (ISO 846-VD 6022)
- Welded synthetic media pocket construction
- Final pressure drop: 300 Pa, recommended final pressure drop: 250Pa
- Max Temperature: 70°C
- Humidity: 100% RH

Product Code	Height A (mm)	Width B (mm)	Depth C (mm)	Pocket	Header (mm)	Media Area (m ²)	Flow Rate (m ³ /h)	Initial Pressure Drop (pa)
D600/1841	592	592	600	8	20	5.7	2000	52
D600/3641	592	490	600	6	20	4.3	1650	52
D600/2441	592	287	600	4	20	2.8	1000	52
D600/1832	592	592	500	8	25	4.7	1665	54
D600/3632	592	490	500	6	25	3.6	1370	54
D600/2432	592	287	500	4	25	2.4	835	54
D600/1821	592	592	380	8	20	3.6	3400	133
D600/3622	592	490	380	6	20	2.7	2900	133
D600/2422	592	287	380	4	20	1.8	1700	133



FILTREX

SMART FILTRATION