


E500 PROGUARD NW BAG FILTER

HIGH EFFICIENCY SYNTHETIC BAG FILTER PM2.5 70% (F7)

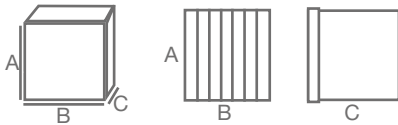

FEATURES

- Very strong double rolled corrosion resistant header frame
- Plastic header frame available upon request
- Tested for food contact according to CE 1935/2004
- Certified for microbial development (ISO 846-VD 6022)
- Synthetic media
- Final pressure drop: 450 Pa, recommended final pressure drop: 300 Pa
- Max Temperature: 70°C
- Humidity: 100% RH

Product Code	Height A mm	Width B mm	Depth C mm	Pockets	Header mm	Media Area (m ²)	Flow Rate (m ³ /hr)	Initial Pressure Drop (Pa)
E500/9023	592	592	635	10	25	7.5	3400	90
E500/9021	592	490	635	8	25	6	2800	90
E500/9022	592	287	635	5	25	3.8	1700	90
E500/9014	592	592	635	8	20	6	3400	100
E500/9015	592	490	635	6	20	4.5	2800	100
E500/9019	592	287	635	4	20	3	1700	100
E500/9032	592	592	500	8	25	5.1	3400	124
E500/9033	592	490	500	6	25	3.8	2800	124
E500/9025	592	287	500	4	25	2.5	1700	124



FILTREX

SMART FILTRATION