
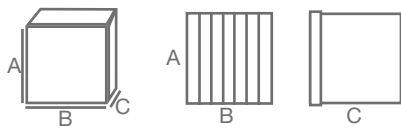


V-FLOW TYPE EC - EPM1

ENERGY FILTER

FEATURES

- Energy saving low pressure loss design
- Strong PVC framed construction
- Adapts to most bag filter installations
- Excellent media stability, particularly suited to variable air volume systems
- Higher airflow capacity than equivalent sized bag filter
- Minipleated fibreglass paper media with glue bead separators
- Final pressure drop: 450Pa
- Max Temperature: 65°C
- Humidity: 90% RH

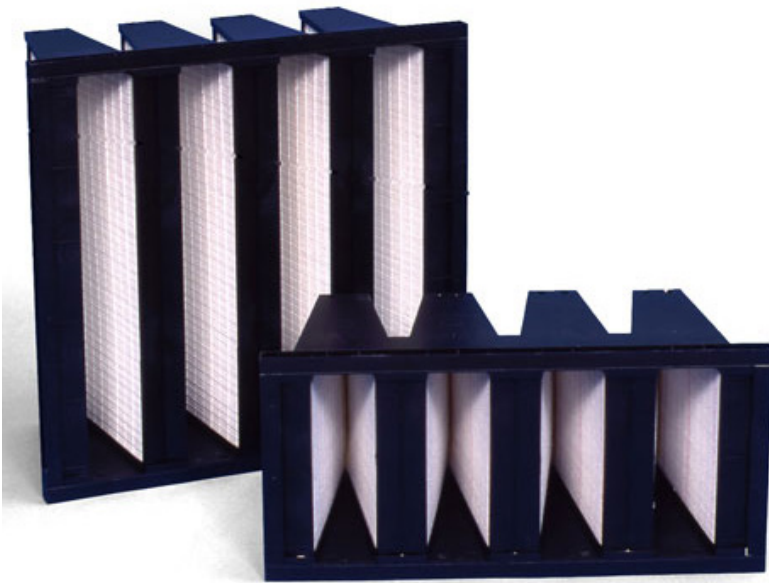

Product Code	Height A (mm)	Width B (mm)	Depth C (mm)	Media Area (m ²)	Flow Rate (m ³ /h)	Initial Pressure Drop (pa)	Grade (ePM1)	Header (mm)
F500/2210	292	592	292	10.5	1700	80	55% (F7)	20
F500/3220	495	592	292	12.3	2800	80	55% (F7)	20
F500/2220	592	592	292	14.0	3400	80	55% (F7)	20
F600/2220	292	592	292	10.5	1700	120	80% (F8)	25
F600/3220	495	592	292	12.3	2800	120	80% (F8)	25
F600/1220	592	592	292	14.0	3400	120	80% (F8)	25



FILTREX

SMART FILTRATION