


# V-FLOW TYPE XL - EPM1 55% (F7)

## FILTER



### FEATURES

- Energy saving low pressure loss design
- Strong PVC framed construction
- Adapts to most bag filter installations
- Excellent media stability, particularly suited to variable air volume systems
- Higher airflow capacity than equivalent sized bag filter
- Minipleated fibreglass paper media with glue bead separators
- Final pressure drop: 450Pa
- Max Temperature: 65°C
- Humidity: 90% RH

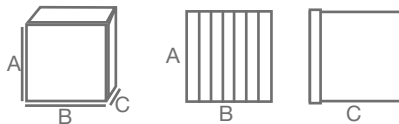

Product Code	Height A (mm)	Width B (mm)	Depth C (mm)	Media Area (m <sup>2</sup> )	Flow Rate (m <sup>3</sup> /h)	Initial Pressure Drop (pa)	Header (mm)
F500/1120	592	592	292	18.8	3400	95.0	25
F500/3120	592	492	292	15.3	2800	95.0	25
F500/2120	592	292	292	8.4	1700	85.0	25



# FILTREX

SMART FILTRATION