
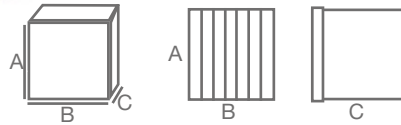


GLASS FIBRE BAG FILTER EPM10 60% (M5)

BAG FILTER

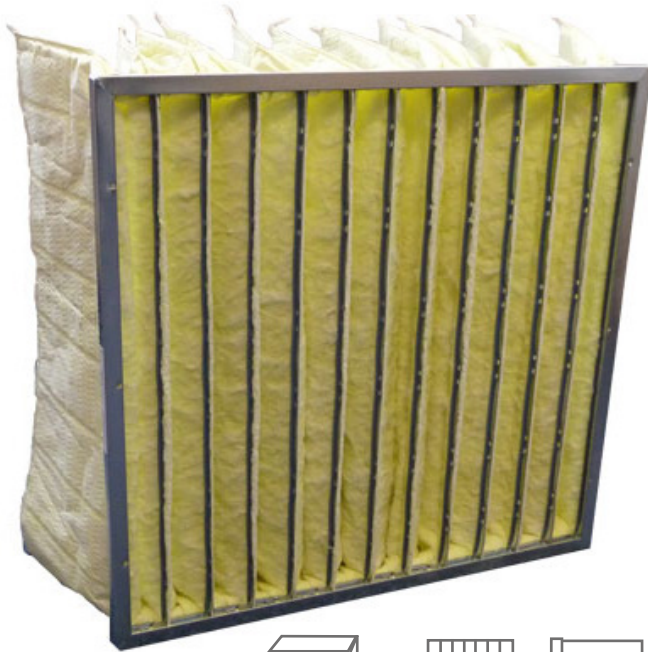

FEATURES

- Very strong double rolled corrosion resistant header frame
- Plastic header frame available upon request
- Tested for food contact according to CE 1935/2004
- High efficiency glass fibre media
- Aerodynamic profiled pockets
- Final pressure drop: 450 Pa, recommended final pressure drop: 250Pa
- Max Temperature: 70°C
- Humidity: 100% RH

Product Group	Height A (mm)	Width B (mm)	Depth C (mm)	Pocket	Media Area (m ²)	Flow Rate (m ³ /h)	Initial Pd (pa)
J300	592	592	635	10	7.75	3400	38
J300	592	492	635	8	6.2	2800	38
J300	592	287	635	5	3.87	1700	38
J300	592	592	635	8	6.2	3400	38
J300	592	492	635	6	4.65	2800	40
J300	592	287	635	4	3.1	1700	40
J300	592	592	635	6	4.5	3400	43
J300	592	492	635	5	3.1	2800	43
J300	592	287	635	3	2.3	1700	43
J300	592	592	535	10	6.65	3400	40
J300	592	492	535	8	5.32	2800	40
J300	592	287	535	5	3.32	1700	40
J300	592	592	535	8	5.22	3400	39
J300	592	492	535	6	3.92	2800	39
J300	592	287	535	4	2.61	1700	39
J300	592	592	380	12	5.56	3400	45
J300	592	492	380	8	3.71	2800	45
J300	592	287	380	6	2.78	1700	45



FILTREX

SMART FILTRATION