
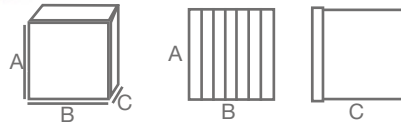


GLASS FIBRE BAG FILTER EPM2.5 50% (M6)

BAG FILTER

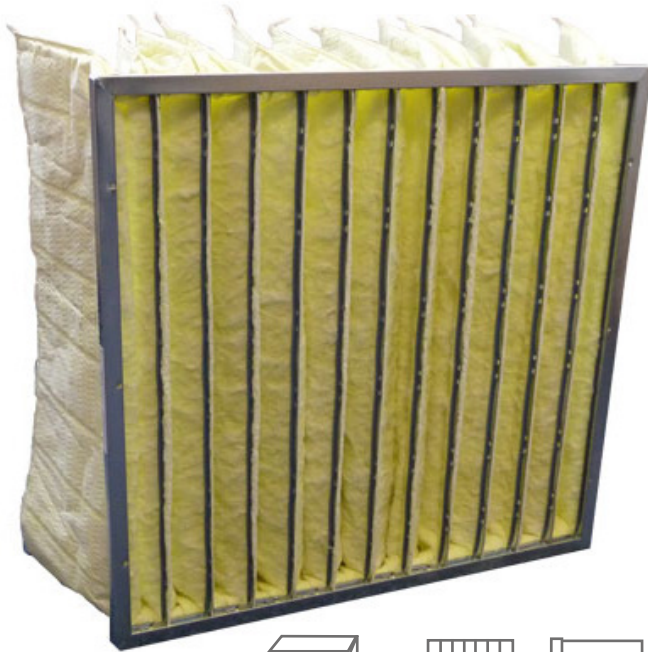

FEATURES

- Very strong double rolled corrosion resistant header frame
- Plastic header frame available upon request
- Tested for food contact according to CE 1935/2004
- High efficiency glass fibre media
- Aerodynamic profiled pockets
- Final pressure drop: 450 Pa, recommended final pressure drop: 250Pa
- Max Temperature: 70°C
- Humidity: 100% RH

Product Group	Height A (mm)	Width B (mm)	Depth C (mm)	Pocket	Media Area (m ²)	Flow Rate (m ³ /h)	Initial Pd (pa)
J400	592	592	635	12	9.03	3400	60
J400	592	492	635	10	6.23	2800	60
J400	592	287	635	6	4.52	1700	60
J400	592	592	635	10	7.50	3400	60
J400	592	492	635	8	5.70	2800	60
J400	592	287	635	5	3.60	1700	60
J400	592	592	635	8	6	3400	58
J400	592	492	635	6	4.50	2800	58
J400	592	287	635	4	3	1700	58
J400	592	592	535	10	6.30	3400	70
J400	592	492	535	8	5.10	2800	70
J400	592	287	535	5	3.20	1700	70
J400	592	592	535	8	5.10	3400	75
J400	592	492	535	6	3.80	2800	75
J400	592	287	535	4	2.50	1700	75
J400	592	592	380	12	5.40	3400	90
J400	592	492	380	8	4.50	2800	90
J400	592	287	380	6	2.70	1700	90



FILTREX

SMART FILTRATION