


GLASS FIBRE BAG FILTER EPM1 70% (F7)

BAG FILTER

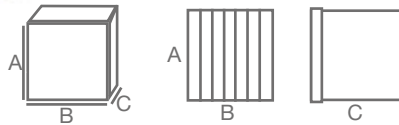

SPECIFICATIONS:

- Very strong double rolled corrosion resistant header frame
- Plastic header frame available upon request
- Tested for food contact according to CE 1935/2004
- High efficiency glass fibre media
- Aerodynamic profiled pockets
- Final pressure drop: 450 Pa, recommended final pressure drop: 250Pa
- Max Temperature: 70°C
- Humidity: 100% RH

Product Code	Height A (mm)	Width B (mm)	Depth C (mm)	Pocket	Header (mm)	Media Area (m ²)	Flow Rate (m ³ /h)	Initial Pd (pa)
J500/1142	592	592	600	10	25	7.5	3400	94
J500/6842	592	490	600	8	25	6.0	2800	94
J500/2542	592	287	600	5	25	3.8	1700	94
J500/1842	592	592	600	8	25	6.0	3400	98
J500/3642	592	490	600	6	25	4.5	2800	98
J500/2442	592	287	600	4	25	3.0	1700	98
J500/1132	592	592	500	10	25	6.3	3400	100
J500/3832	592	490	500	8	25	5.1	2800	100
J500/2532	592	287	500	5	25	3.2	1700	100
J500/1832	592	592	500	8	25	5.1	3400	105
J500/3632	592	490	500	6	25	3.8	2800	105
J500/2432	592	287	500	4	25	2.5	1700	105
J500/1022	592	592	380	12	25	5.4	3400	125
J500/3822	592	490	380	8	25	4.5	2800	125
J500/2622	592	287	380	6	25	2.7	1700	125



FILTREX

SMART FILTRATION