

# PROGUARD DUO™


## DUAL LAYERED BAG FILTER G4 + F8

PROGUARD DUO™  
DUAL LAYERED BAG FILTER G4 + F8



### SPECIFICATIONS:

- Over 50% increased dust holding capacity.
- Efficiency EN779: G4 + F8.
- Media: Synthetic high efficiency (primary filtration) + glassfibre (fine filtration).
- Final Pressure drop: 450Pa
- Maximum Temperature in continuous service: 70°C

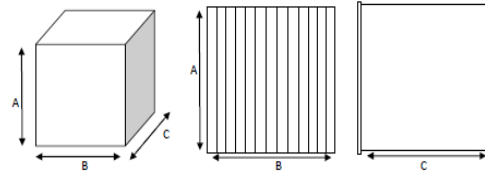

With a pre-filter layer and a high grade F8 secondary layer of filter media, this filter offers exceptional dust holding capacity and in many instances, can eliminate the requirement for a pre-filter. The increased capacity can lead to filters lasting twice as long as standard bag filters.

Efficiency	Height (mm)	Width (mm)	Depth (mm)	Pockets	Media Area (m <sup>2</sup> )	Flow Rate (m <sup>3</sup> /h)	Delta P (Pa)
F8	592	592	635	8	6,2	3400	108
F8	492	592	635	6	4,65	2800	108
F8	592	287	635	4	3,1	1700	108

Note: Side, front or rear seals can be applied to order or supplied on a roll.  
Non-standard sizes available to order.  
Technical and application advice is available on all our products, please ask.



## FILTREX

SMART FILTRATION